

CORAYVAC[®]

HEATING CONTROL

Zoning Control



Stand Alone Control


- Capable of operating up to two heating systems and four heating zones
- Heating system management through pre-programmed thermostats
- Durable enclosures for increased longevity



www.robertsgordon.com


THE INDUSTRY LEADER
RADIANT
EFFICIENCY™

ROBERTS GORDON® THE EXCLUSIVE PRODUCER OF CORAYVAC™

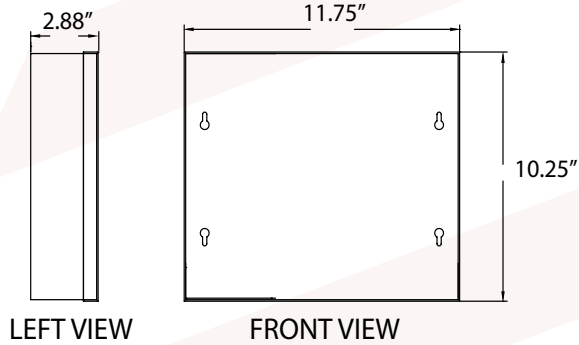

CORAYVAC® HEATING CONTROL
[7.8 lbs.] [3.5 kg.]

	HEATING CONTROLS
Controller Electrical Rating	120 V (+/- 10%) 1ø, 60Hz, 20 Amps
Construction	16 gauge powder coated steel, hinged door, removable knockouts
Zoning Capabilities	Up to 4 Zones Up to 2 ROBERTS GORDON® infrared heating systems (Any combination of CORAYVAC® system(s), or VANTAGE® Multiburner system(s))
Status Indication	9 - visual (LED) status of power to 4 – zones; 2 – Pump Power; 2 – Pressure Switch; 1 – Line Power
Approvals	ETL Intertek 5001470; Conforms to UL STD 873; Certified to CAN/CSA STD C22.2 NO. 24
Protection	IP20 Rating
Operating Temperature Limit	95 °F (35°C)
Zone Relay	Single pole 20 A, 120 V (resistive)
Pump Relay	Single pole 20 A, 120 V (resistive) 1 HP motor rated
Thermostats	Low Voltage 24 V

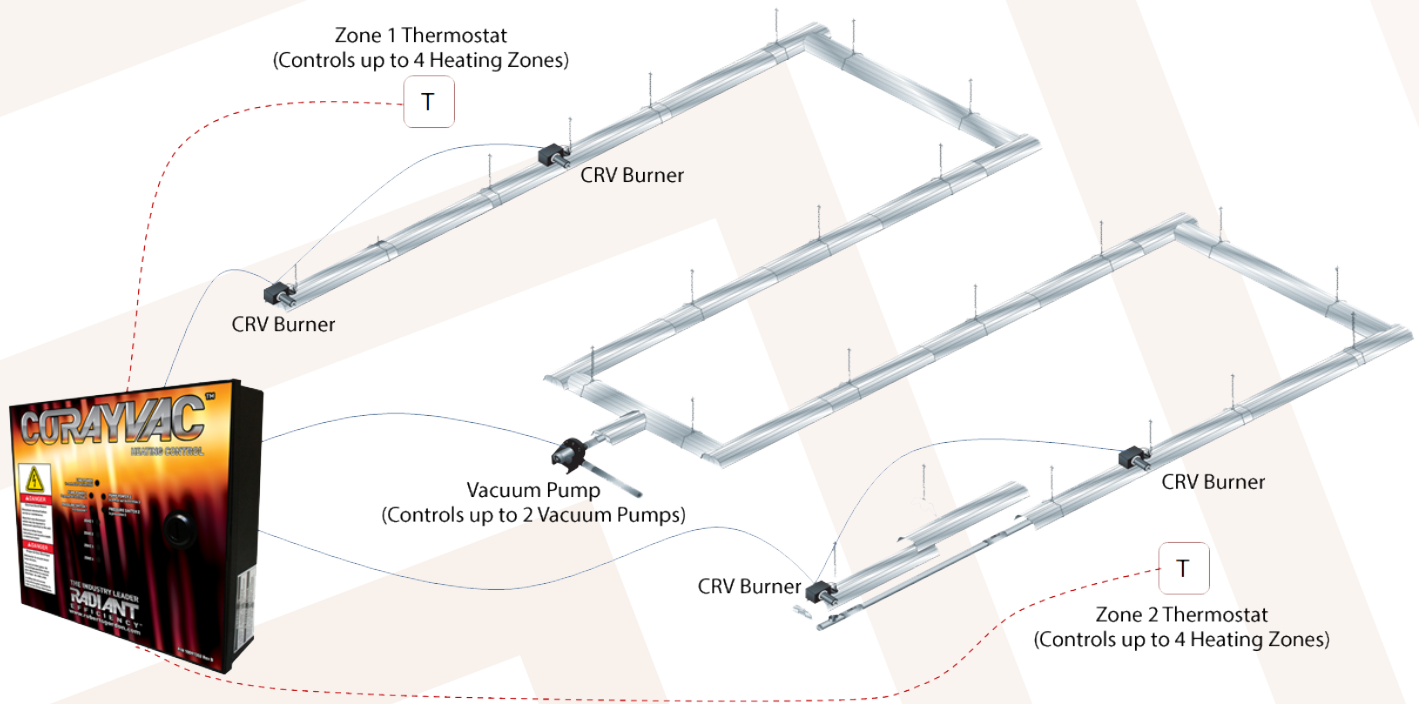

Roberts-Gordon, LLC
1250 William Street
P.O. Box 44
Buffalo, NY 14240-0044 USA
Telephone: 716.852.4400
www.robertsgordon.com

Further Information: Applications, engineering and detailed guidance on systems design, installation and product performance is available through ROBERTS GORDON® representatives. Please contact us for any further information you may require, including the Installation, Operation and Service Manual.

This product is not for residential use.
This document is intended to assist licensed professionals in the exercise of their professional judgement.